

We're working in your area

Main North Road bus priority lane improvements

What	We're upgrading bus lanes to help improve bus reliability and travel times
Where	Main North Road, between Winston Avenue and Sawyers Arms Road
When	Wednesday 8 January 2020 until August 2020
Why	The upgrades to the bus lanes will improve the reliability and travel times for buses travelling along Main North Road
Contact	Phone Haidee Scott, communications advisor on 027 665 4007 or email haidee.scott@perception.nz . Phone Barry Templeton, project manager on 027 704 5734 or email barry.templeton@citycare.co.nz .

What we're doing

Not long to go! Although the COVID-19 lockdown slowed us down a little, we're working hard doing our best to finish most of our work before the end of July.

Some pieces of work, such as the central median islands along Main North Road and the Countdown side of the Grassmere Street intersection will be finished in August.

Road resurfacing

Council's roading contractor has been resurfacing the road at night and it's looking great!

They've finished the east side of Main North Road and will finish resurfacing the western side when all other work is finished.

Langdons Road intersection

You might have noticed we've spent a lot of time working at the Police station corner. This is because we discovered the level of the planned footpath was too shallow, so we put in a new storm water channel to avoid ponding in wet weather.

All of the underground works will be finished this week, including the cabling for the new traffic lights, then next week we'll put in the remaining foundations (except one) and asphalt the footpaths, weather depending.



Thanks for your patience as we work in your area



Noise

There may be increased noise, dust and vibrations during work but it shouldn't impact on your power, water, gas or phone services.



Safety

Safety is our biggest priority so please keep children and pets away from worksites.



Other projects

Learn more about the Council's road and pipe works.

ccc.govt.nz/works

Storm water work

We've finished replacing the old asbestos storm water pipe and by the end of this week we'll finish reinforcing it with concrete (when pipes are shallow, they're reinforced to make sure they don't collapse).

Once this team finishes the storm water work, they'll move north to start footpath and road re-alignment work on the west side of Main North Road beside Countdown.

Another team is following our storm water team, putting in a new kerb and channel (gutter), reconstructing the road shoulder and preparing the footpath for sealing. They will work at night outside the entrances to Baby Factory and Cash Converters.

Grassmere Street


The new traffic light foundations for the eastern side of the Grassmere Street intersection and the eastern side of Main North Road towards Sawyers Arms Road have arrived. We plan to install these over the next two weeks.

Once installed, we'll asphalt the remaining sections of footpath.

Northlands (Countdown)/Halliwell Avenue intersection

We've put in a new storm water drain (sump) and pipe across the entrance to the mall, and are laying some of the new patterned concrete.

At the end of the month we'll start constructing the new layout of the mall entrance - see image below.

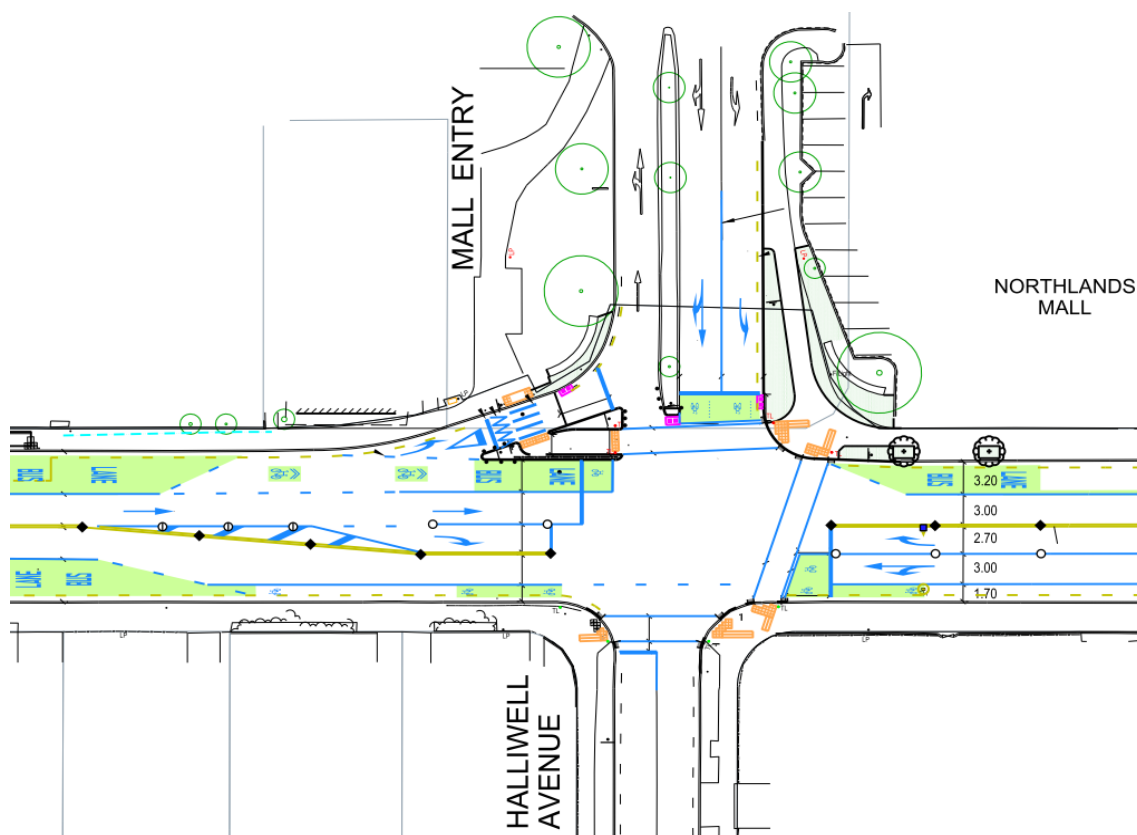

Thanks for your patience as we work in your area



Noise

There may be increased noise, dust and vibrations during work but it shouldn't impact on your power, water, gas or phone services.



Safety

Safety is our biggest priority so please keep children and pets away from worksites.



Other projects

Learn more about the Council's road and pipe works.

ccc.govt.nz/works

